


NOTE:
 1.MATERIAL:
 a.HOUSING:PA66 UL94V-0
 b.CONTACT:Stainless Steel
 (SURFACE PLATING: Ni100u"-120u")
 SEE ORDERING INFORMATION

2.ELECTRIC:
 d.CONTACT RESISTANCE: 30 MILLIOHMS MAX
 b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
 d.OPERATING TEMPERATURE: -55°C~ +105°C

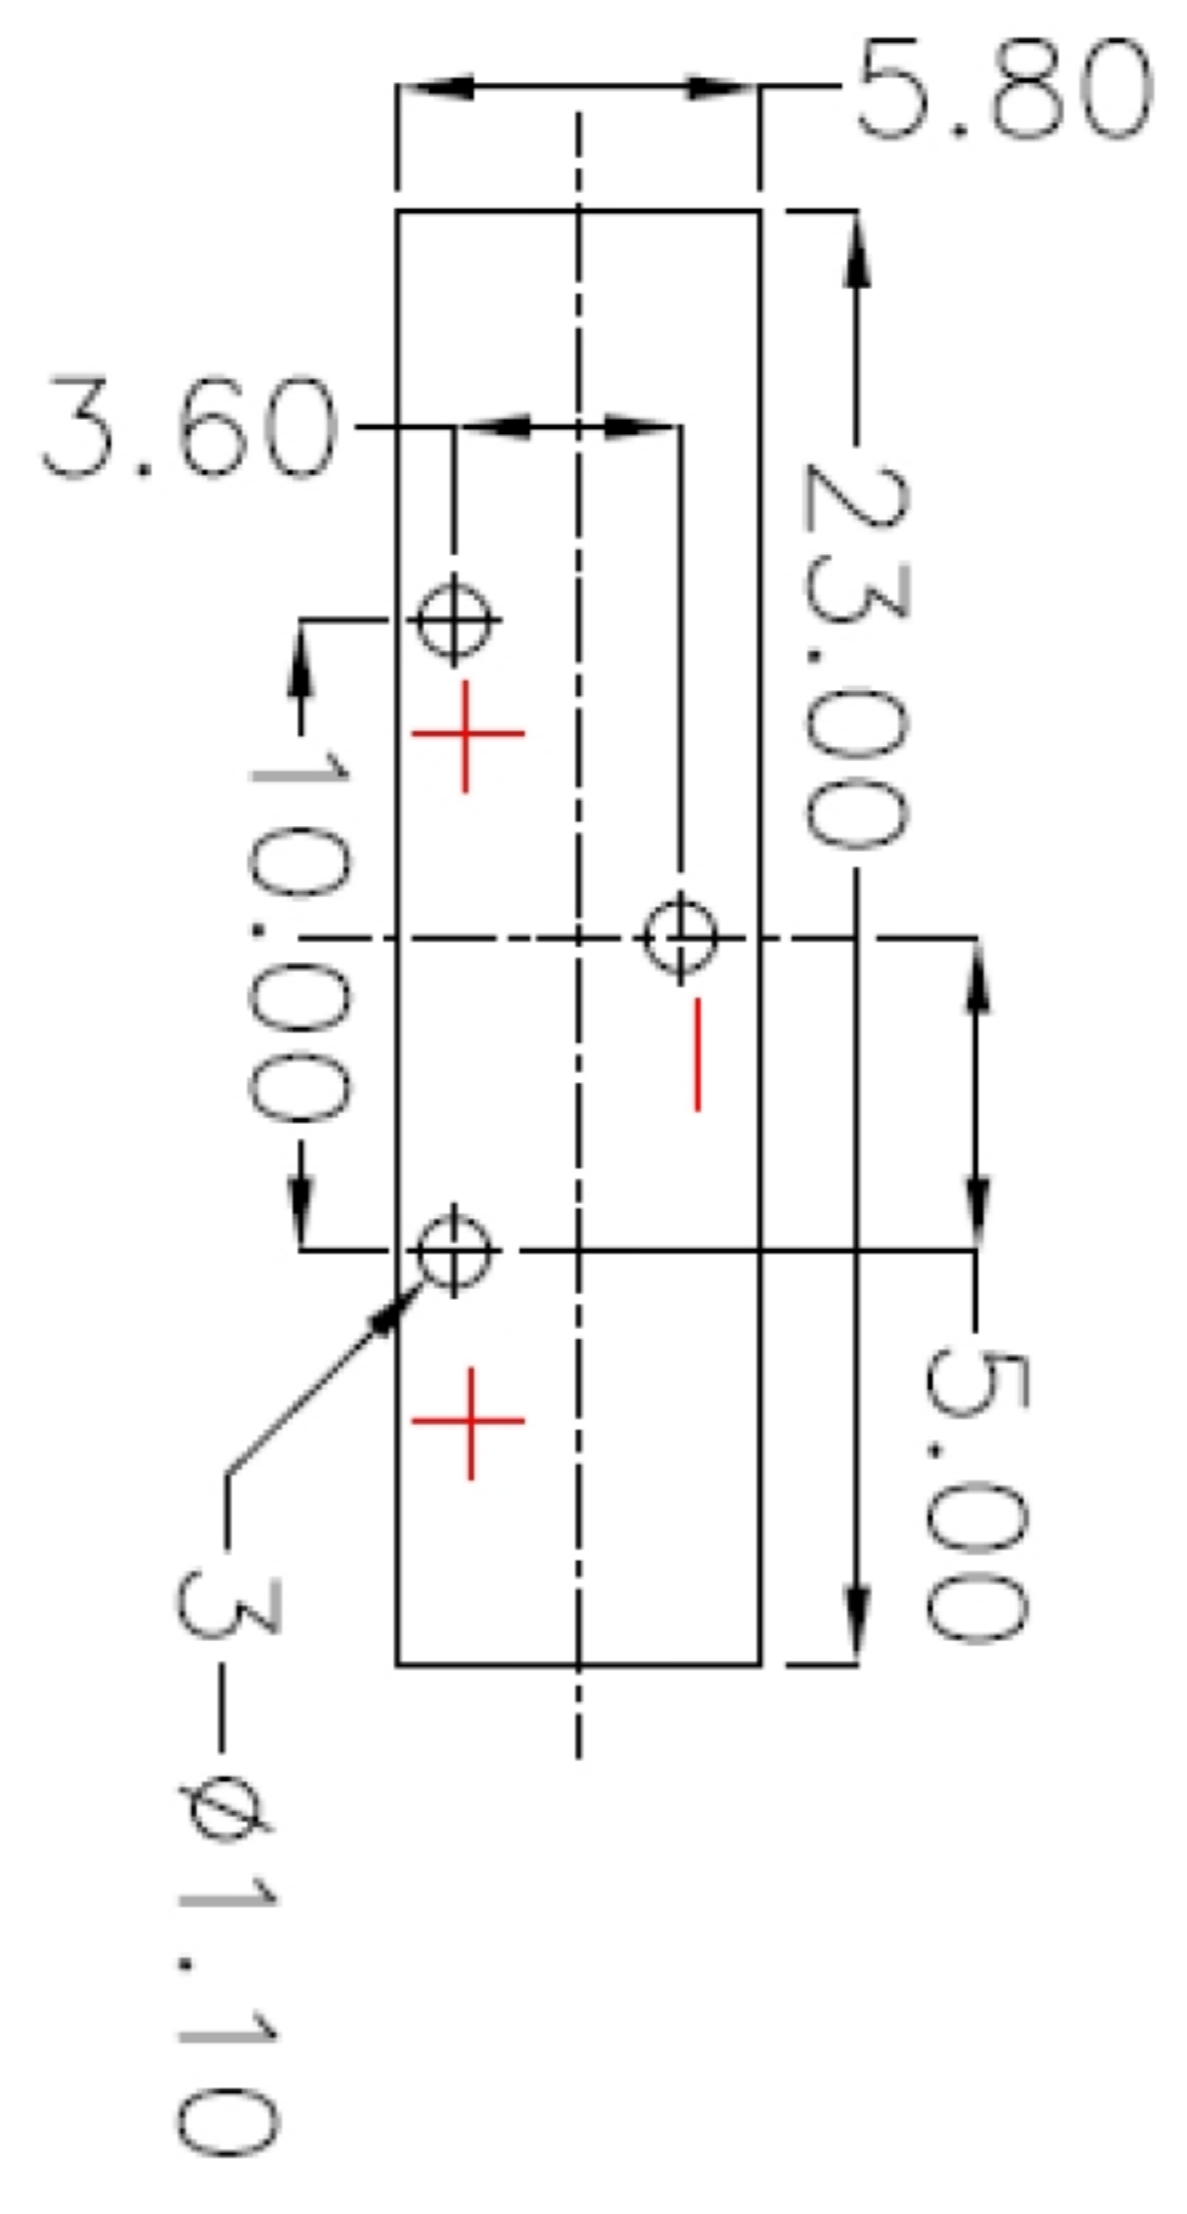

PCB Layout Diagram
 Top View

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	深圳市联丰电子有限公司 SHENZHEN LINFENGYING ELECTRONIC CO.,LTD			
DRAWN	ZHIWEI.CHEN	2015.07.07	TITLE:	*****		
CHECKED			PART NO.	GP07-CR2032-16		
APPROVALS			UNIT: mm	SCALE: 1:1	PROJ:	
TOLERANCES ARE		30~Ø1.1	±0.30	ANGLE	±2'	DRAWING NO.
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
SHEET 1 OF 1						